

ARCTIQ

Euroscreen’s standard matt white surface with fibreglass support and black-backed. It diffuses projected light in all directions, so the image can be seen from any angle. Requires control of ambient light in the audience area. Suitable for “wear & tear” installations, such as public restaurants and conference rooms. Washable. Flame and mildew resistant.



SCREEN SURFACE

- Front projection
- Average gain 1.0
- Viewing angle 180°
- Thickness 0.37 mm
- Black borders available

HD RESOLUTION	1.0 GAIN
0.37 THICKNESS	180° VIEWING ANGLE
	98% BLACKOUT

¹Composition may differ slightly for some screen sizes/models.

²Individual test results may vary. Results based on a representative sample in Draper inventory.

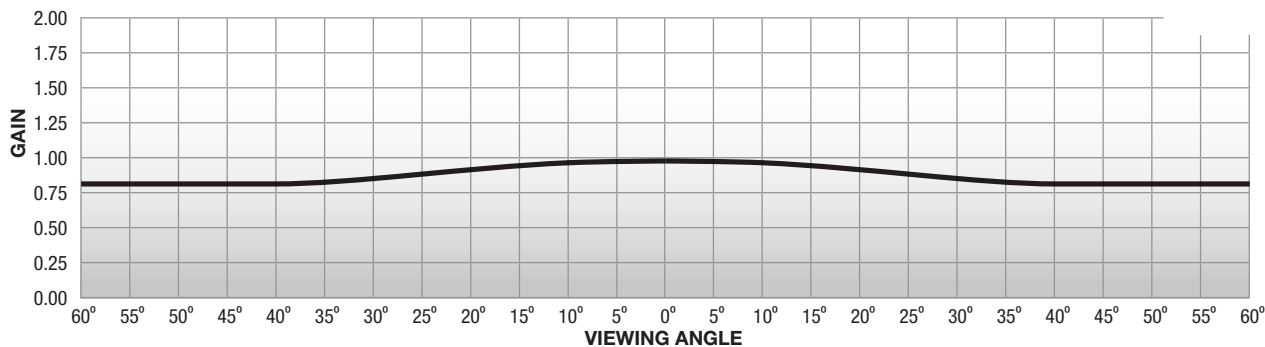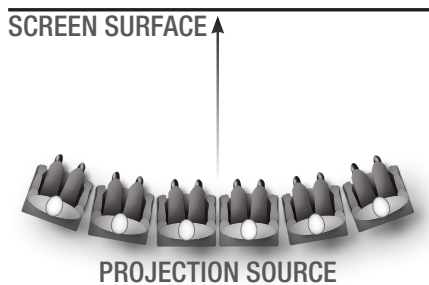

GAIN 1.0 VIEWING ANGLE 180° THICKNESS 0.37 MM FULL HD COMPLIANT