

# ARCTIQ

Euroscreen's standard matt white surface with fibreglass support and black-backed. It diffuses projected light in all directions, so the image can be seen from any angle. Requires control of ambient light in the audience area. Suitable for "wear & tear" installations, such as public restaurants and conference rooms. Washable. Flame and mildew resistant.



## SCREEN SURFACE

- Front projection
- Average gain 1.0
- Viewing angle 180°
- Thickness 0.37 mm
- Black borders available

<b>8K</b> RESOLUTION	<b>1.0</b> GAIN
<b>0.37</b> THICKNESS	<b>180°</b> VIEWING ANGLE
	<b>98%</b> BLACKOUT

<sup>1</sup>Composition may differ slightly for some screen sizes/models.

<sup>2</sup>Individual test results may vary. Results based on a representative sample in Enyroom inventory.

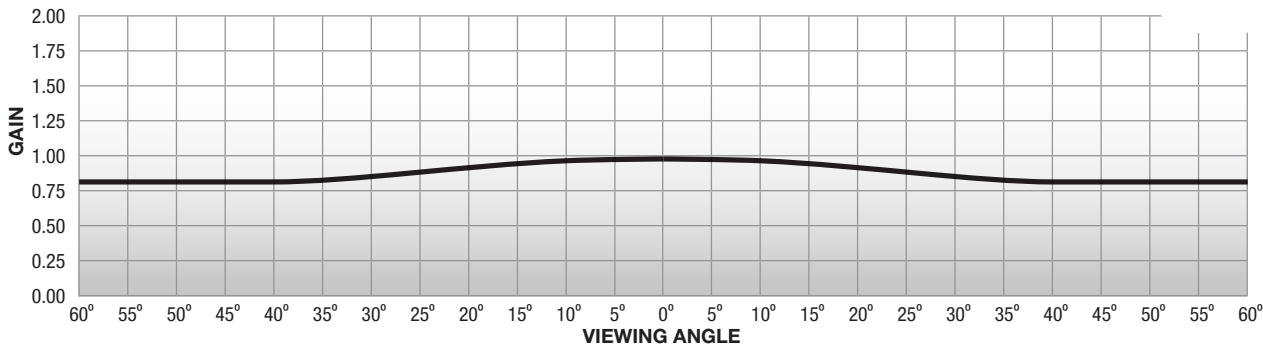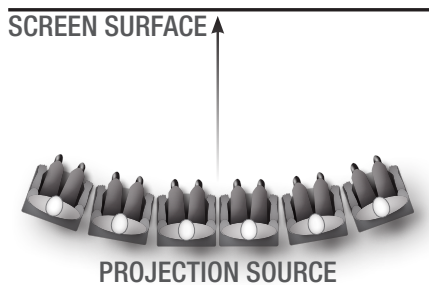

**GAIN 1.0 VIEWING ANGLE 180° THICKNESS 0.37 MM 8K COMPLIANT**